

1.Description

This N-Channel MOSFET has been designed specifically to improve the overall efficiency of DC/DC converters using either synchronous or conventional switching PWM controllers. It has been optimized for low gate charge, low $R_{DS(ON)}$ and fast switching speed.

2.Features

- $V_{DS(V)}=25V$
- $I_D=35A$
- $R_{DS(ON)}<8.5m\Omega(V_{GS}=10V)$
- $R_{DS(ON)}<12m\Omega(V_{GS}=4.5V)$
- Low gate resistance
- Low gate charge: $Q_{g(10)}=21nC(Typ)$, $V_{GS}=10V$


3.Application

- Vcore DC-DC for Desktop Computers and Servers
- VRM for Intermediate Bus Architecture

4.Pinning information

Pin	Symbol	Description
1	G	GATE
2	D	DRAIN
3	S	SOURCE

TO-252(DPAK)
top view

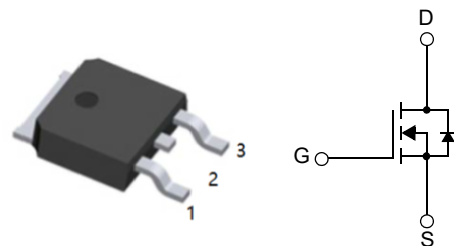

5.Absolute Maximum Ratings $T_c=25^\circ C$

Parameter	Symbol	Rating	Units
Drain to Source Voltage	V_{DS}	25	V
Gate to Source Voltage	V_{GS}	± 20	
Drain Current -Continuous (Package Limited)	I_D	35	A
-Continuous (Die Limited)		60	
-Pulsed (Note 1)		224	
Single Pulse Avalanche Energy (Note 2)	E_{AS}	73	mJ
Power Dissipation	P_D	50	W
Storage Junction Temperature Range	T_J, T_{STG}	-55 to 175	$^\circ C$



6.Thermal Characteristics

Parameter	Symbol	Rating	Units
Thermal Resistance, Junction-to-Case TO-252,TO-251	$R_{\theta JC}$	3	°C/W
Thermal Resistance, Junction-to-Ambient TO-252,TO-251	$R_{\theta JA}$	100	°C/W
Thermal Resistance, Junction-to-Ambient TO-252,1in ² copper pad area	$R_{\theta JA}$	52	°C/W



7. Electrical Characteristic (T_J=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	BV _{DSS}	I _D =250μA, V _{GS} =0V	25			V
Breakdown Voltage Temperature Coefficient	$\frac{\Delta BV_{DSS}}{\Delta T_J}$	I _D =250μA Referenced to 25°C		12		mV/°C
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =20V			1	μA
		V _{GS} =0V, T _J =150°C			250	μA
Gate to Source Leakage Current	I _{GSS}	V _{GS} =±20V			±100	nA
Gate to Source Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1.2	1.8	2.5	V
Gate to Source Threshold Voltage Temperature Coefficient	$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	I _D =250μA Referenced to 25°C		-6.3		mV/°C
Drain to Source On Resistance	R _{DS(on)}	V _{GS} =10V, I _D =35A		6.5	8.5	mΩ
		V _{GS} =4.5V, I _D =35A		9.1	12	mΩ
Input Capacitance	C _{iss}	V _{DS} =13V, V _{GS} =0V, f=1MHz		1080	1440	pF
Output Capacitance	C _{oss}			265	355	pF
Reverse Transfer Capacitance	C _{rss}			180	270	pF
Gate Resistance	R _g	f=1MHz		0.9		Ω
Turn-On DelayTime	t _{D(on)}	V _{DD} =13V, I _D =35A V _{GS} =10V, R _{GEN} =17Ω		7	14	ns
Rise Time	t _r			9	18	ns
Turn-Off DelayTime	t _{D(off)}			43	69	ns
Fall Time	t _f			24	38	ns
Total Gate Charge	Q _g	V _{GS} =0V to 10V	V _{DD} =13V	21	29	nC
Total Gate Charge	Q _g	V _{GS} =0V to 5V	I _D =35A	11.2	16	nC
Gate to Source Gate Charge	Q _{gs}	I _g =1mA		3.5		nC
Gate to Drain "Miller" Charge	Q _{gd}			4.7		nC
Source to Drain Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =35A		0.92	1.25	V
		V _{GS} =0V, I _S =15A		0.84	1	V



Reverse Recovery Time	t_{rr}	$I_F=35A, di/dt=100A/\mu s$		28	42	ns
Reverse Recovery Charge	Q_{rr}	$I_F=35A, di/dt=100A/\mu s$		20	30	nC

Notes:

- 1: Pulse time<300μs, Duty cycle = 2%.
- 2: Starting $T_J=25^{\circ}C$, $L=0.3mH$, $I_{AS}=22A$, $V_{DD}=23V$, $V_{GS}=10V$.



8.1 Typical characteristic

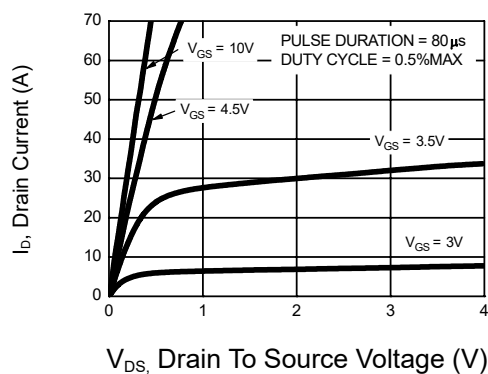


Figure 1: On-Region Characteristics

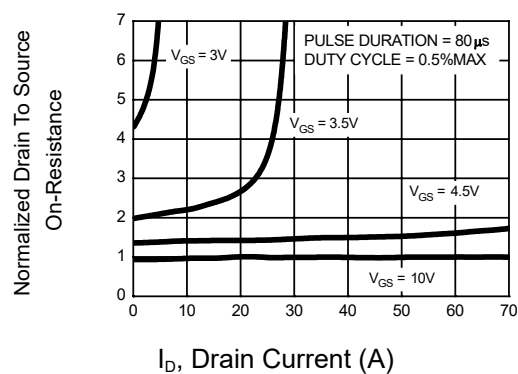


Figure 2: Normalized On-Resistance vs Drain Current and Gate Voltage

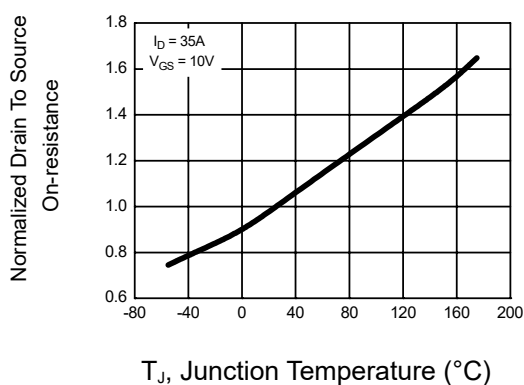


Figure 3: Normalized On Resistance vs Junction Temperature

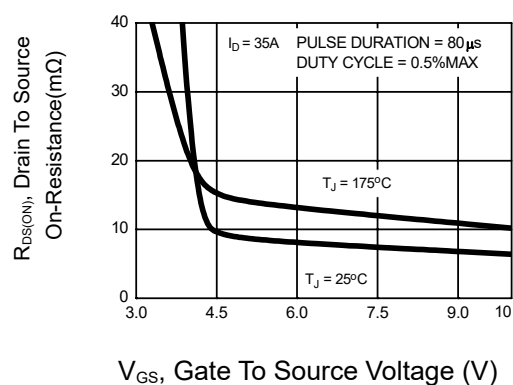


Figure 4: On-Resistance Variation with Gate-to-Source Voltage

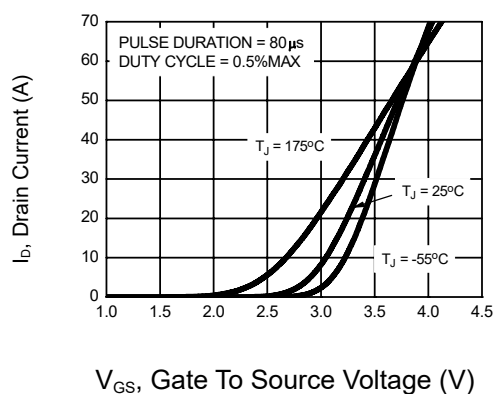


Figure 5: Transfer Characteristics

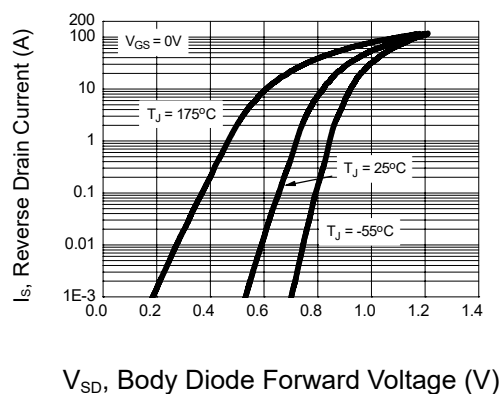


Figure 6: Source to Drain Diode Forward Voltage vs Source Current



8.2 Typical characteristic

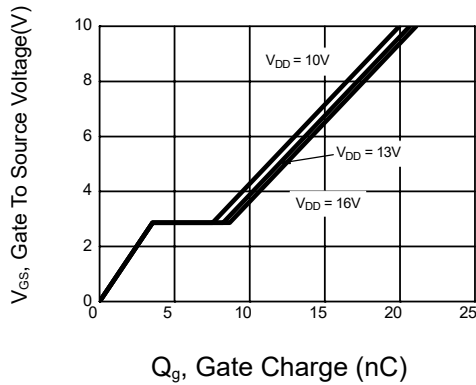


Figure 7: Gate Charge Characteristics

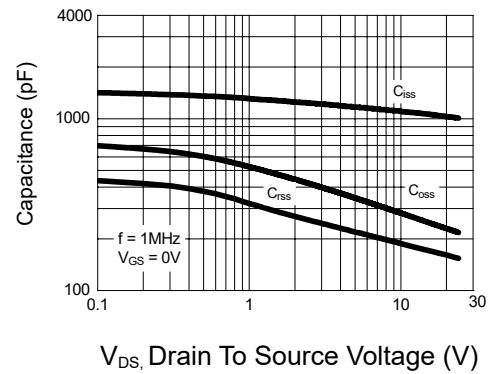


Figure 8: Capacitance vs Drain to Source Voltage

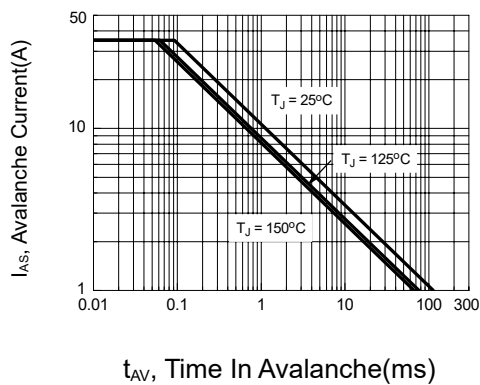


Figure 9: Unclamped Inductive Switching Capability

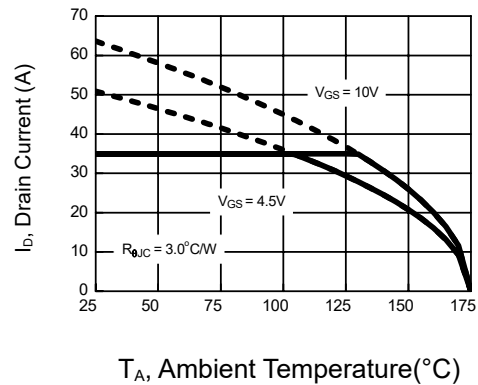


Figure 10: Maximum Continuous Drain Current vs Case Temperature

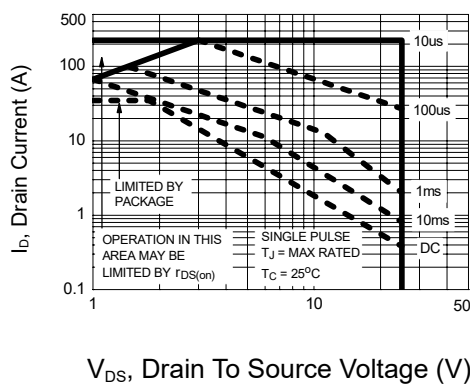


Figure 11: Forward Bias Safe Operating Area


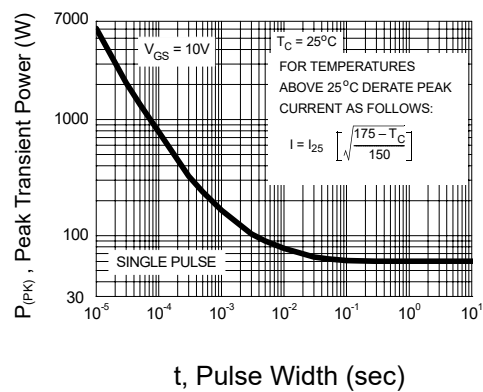


Figure 12: Single Pulse Maximum Power Dissipation




8.3Typical characteristic



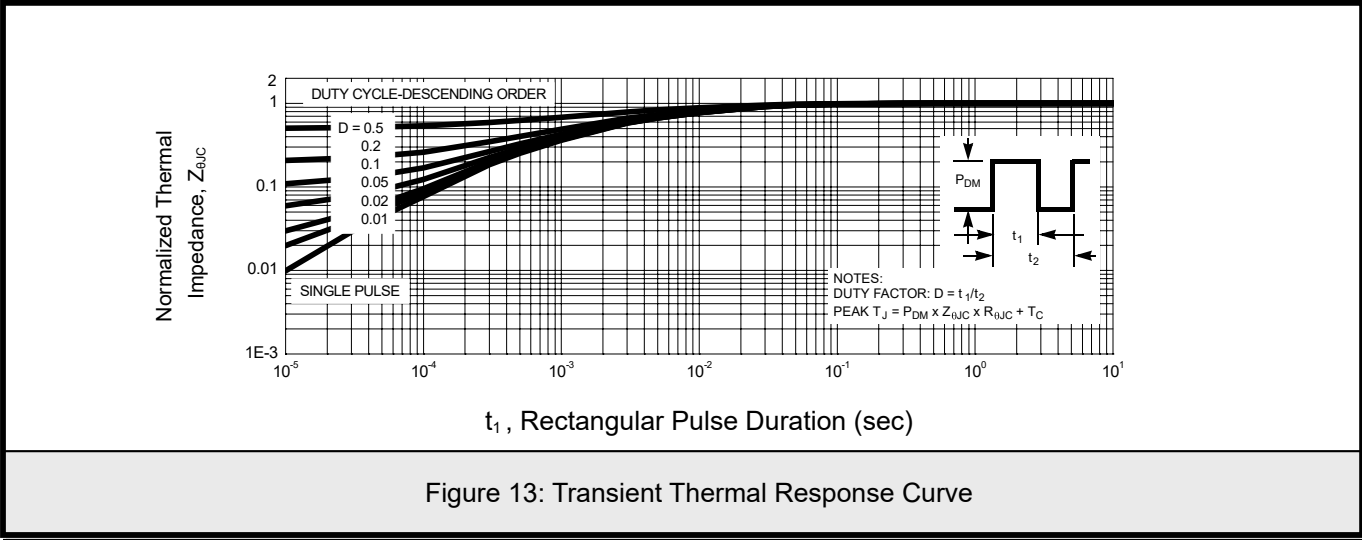

9.TO-252 Package Outline Dimensions

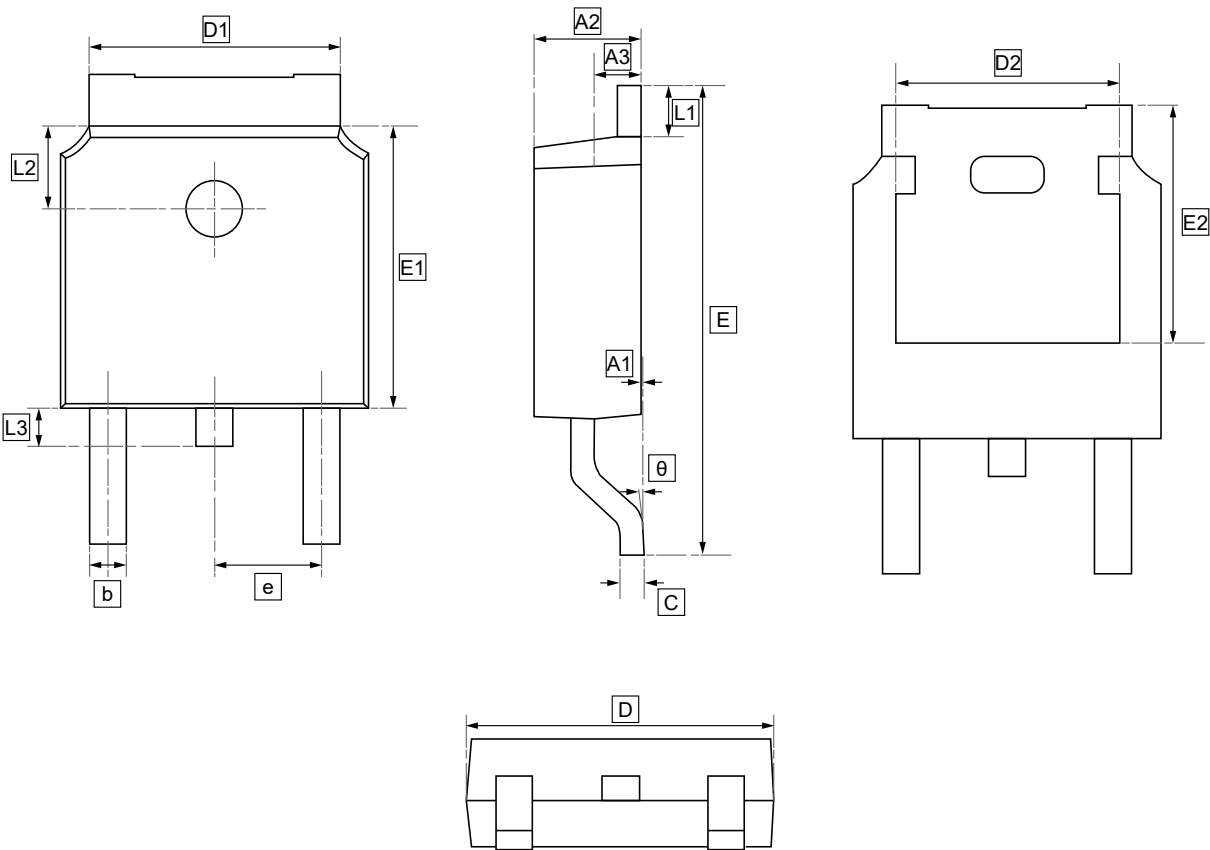


DIMENSIONS (mm are the original dimensions)

Symbol	A1	A2	A3	b	c	D	D1	D2	E	E1	E2	e	L1	L2	L3	θ
Min	0.00	2.18	0.90	0.65	0.46	6.35	4.95	4.32	9.40	5.97	5.21	2.286	0.89	1.70	0.60	0.00
Max	0.13	2.39	1.10	0.85	0.61	6.73	5.46	4.90	10.41	6.22	5.38		1.27	1.90	1.00	8.00



10.Ordering information



yy: Year Code
ww: Week Code

Order Code	Package	Base QTY	Delivery Mode
UMW FDD8780	TO-252	2500	Tape and reel



11.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.