

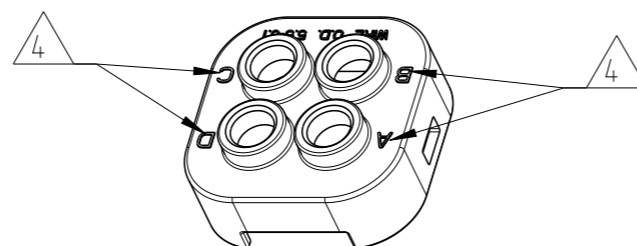
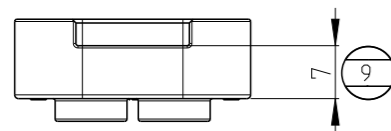


0/1-2411706-X
UNIFORM CABLE SPEC

P	LTR	DESCRIPTION	DATE	DWN	APVD
A3		ECN-23-275767	03SEP23	J.F	E.J
A4		ECN-24-253989	08DEC23	J.F	E.J
A5		ECN-24-259602	08MAR24	J.F	E.J
A6		ECN-25-326237	11JUN24	J.F	E.J


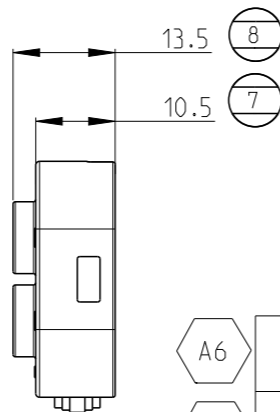


- 1. MATERIAL: PA6 V0 CTI>=600
- 2. MATING PART:
X-2404653-X PLUG ASSY
- 3. SUITABLE WIRE O.D.
- 4. PIN CAVITY NUMBER MARKING
- 5. REFER TO DRAWING C-2415639
- 6. MATERIAL: PBT GF30
- 7. PRODUCT USING FOLLOW KIT DRAWING:
2406990-HVA630 4P PLUG.SHIELDED;
2478060-HVU630 4P PLUG.UNSHIELDED

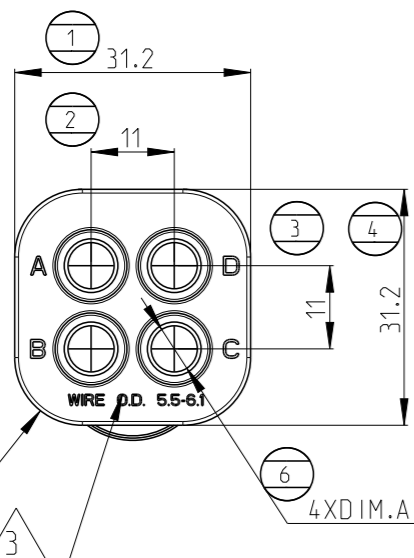

COLOR	MATERIAL	WIRE O.D.	DIM. A	DIM. B	DIM. C	DIM. D	DESCRIPTION	REV.	PART NO.
BLACK	6	A/B: Ø 6.0-Ø 6.5 C/D: Ø 5.3-Ø 5.8	Ø 6.5	Ø 6.5	Ø 5.8	Ø 5.8	HVA630 4P REC SEAL COVER, PBT,HB,MIXED CABLE SPEC	A	3-2411706-2
ORANGE	1	A/D: Ø 6.0-Ø 6.5	Ø 6.5	Ø 5.8	Ø 5.8	Ø 6.5	HVA630 4P REC SEAL COVER, PA6.VO,MIXED CABLE SPEC	A	2-2411706-6
		B/C: Ø 5.3-Ø 5.8	Ø 6.5	Ø 5.8	Ø 5.8	Ø 6.5		A	2-2411706-5
		A/B: Ø 6.0-Ø 6.5	Ø 6.5	Ø 6.5	Ø 4.7	Ø 4.7		A	2-2411706-4
		C/D: Ø 4.2-Ø 4.7	Ø 4.2	Ø 3.4	Ø 4.2	Ø 3.4		A	2-2411706-3
		A/C: Ø 3.9-Ø 4.2	Ø 4.4	Ø 5.1	Ø 5.1	Ø 4.4		A	2-2411706-2
		B/D: Ø 3.1-Ø 3.4	Ø 6.5	Ø 6.5	Ø 5.8	Ø 5.8		A	2-2411706-1
		A/D: Ø 4.0-Ø 4.4	Ø 5.8	Ø 6.5	Ø 6.5	Ø 5.8		A	1-2411706-3
		B/C: Ø 4.6-Ø 5.0	Ø 6.0-Ø 6.5	Ø 6.5	Ø 5.8	Ø 5.8		A	1-2411706-2
		A/B: Ø 6.0-Ø 6.5	Ø 5.5-Ø 6.1	Ø 6.1	Ø 6.1	Ø 6.1		A	1-2411706-1
		C/D: Ø 5.3-Ø 5.8	Ø 4.5-Ø 5.1	Ø 5.1	Ø 5.1	Ø 5.1		A	2411706-6
ORANGE	1	Ø 3.9-Ø 4.3	Ø 4.4	Ø 4.4	Ø 4.4	Ø 4.4	HVA630 4P REC SEAL COVER, PA6.VO.UNIFORM CABLE SPEC	-	2415639-1
		Ø 4.2-Ø 4.7	Ø 4.7	Ø 4.7	Ø 4.7	Ø 4.7		A	2411706-4
		Ø 5.3-Ø 5.8	Ø 5.8	Ø 5.8	Ø 5.8	Ø 5.8		A	2411706-3
		Ø 6.0-Ø 6.5	Ø 6.5	Ø 6.5	Ø 6.5	Ø 6.5		A	2411706-2
		Ø 5.5-Ø 6.1	Ø 6.1	Ø 6.1	Ø 6.1	Ø 6.1		A	2411706-1
		Ø 5.4-Ø 5.8	Ø 5.8	Ø 5.8	Ø 5.8	Ø 5.8		A	1-2411706-3

2/3-2411706-X
MIXED CABLE SPEC

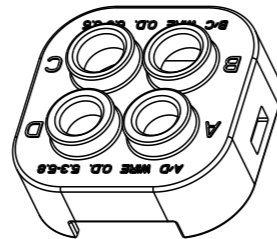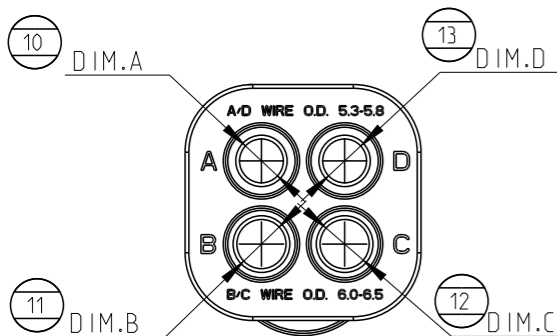

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	±0.5	1 PLC	±0.3
2 PLC	±0.2	3 PLC	±
4 PLC	±	ANGLES	±
MATERIAL SEE TABLE	FINISH		

DWN	X.LI	07JAN2022
CHK	R.CHEN	22APR2022
APVD	F.JIANG	22APR2022
PRODUCT SPEC	108-160496	
APPLICATION SPEC	114-160249	
WEIGHT	-	
CUSTOMER DRAWING		

TE Connectivity

NAME: REC CONN CVR,4POS,AMP MCP 6.3/4.8K

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-2411706

SCALE: 1:1 SHEET: 1 OF 1 REV: A6