


Features

- Bi-directional ESD protection of one line
- Reverse stand-off voltage: 12V
- Low reverse clamping voltage
- Low leakage current
- Fast response time
- IEC 61000-4-2 (ESD) immunity test :
- Air discharge: $\pm 30\text{kV}$
- Contact discharge: $\pm 30\text{kV}$

Application

- Computers and peripherals
- High speed data lines
- Audio and video equipment
- Cellular handsets and accessories
- Subscriber identity module(SIM) card protection
- Portable electronics
- FireWire
- Other electronics equipments communi- cation systems



Absolute Maximum Rating


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	Ppk	350	W
Peak Pulse Current (8/20 μs)	IPP	15	A
ESD per IEC 61000-4-2 (Air)	VESD	± 30	kV
ESD per IEC 61000-4-2 (Contact)		± 30	
Operating Temperature Range	TJ	-55to +125	$^{\circ}\text{C}$
Storage Temperature Range	Tstg	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				12	V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	14.2		16.2	V
Reverse Leakage Current	I_R	$V_{RWM} = \pm 12\text{V}$			0.1	μA
Clamping Voltage	V_C	$I_{PP} = 15\text{A}$ (8 x 20 μs pulse)			28	V
Junction Capacitance	C_j	$V_R = 0\text{V}$, $f = 1\text{MHz}$			45	pF

Electronics Parameter


Symbol	Parameter
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_C
V_{BR}	Breakdown Voltage @ I_T
I_R	Reverse Leakage Current @ V_{RWM}
V_{RWM}	Reverse Standoff Voltage

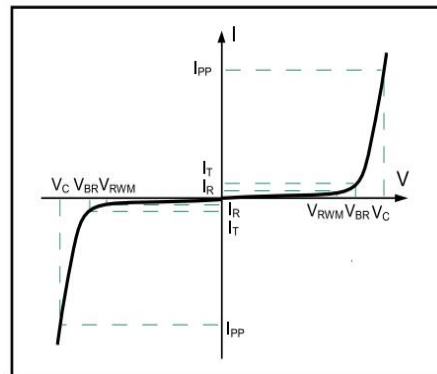


RATING AND CHARACTERISTIC CURVES

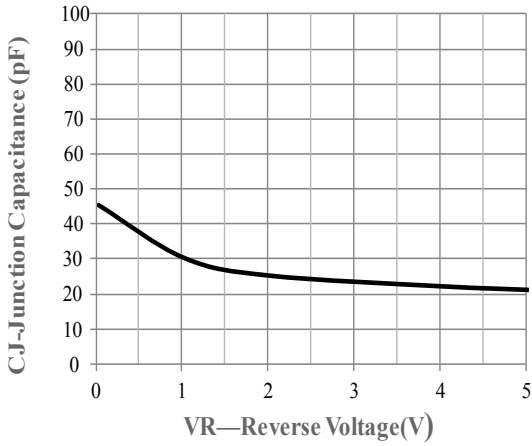


Junction Capacitance vs. Reverse Voltage

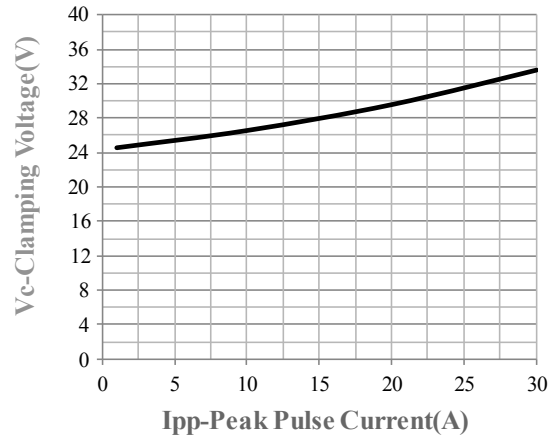


Clamping Voltage vs. Peak Pulse Current

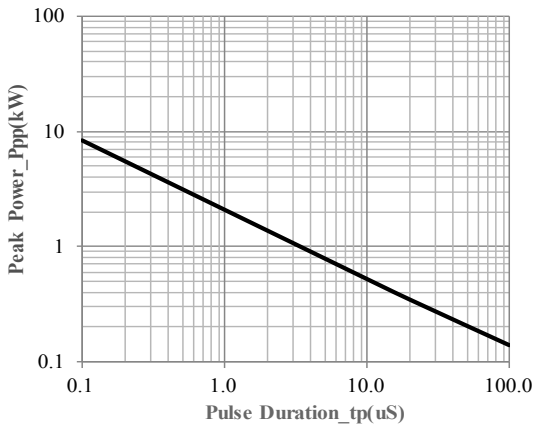


Peak Pulse Power vs. Pulse Time

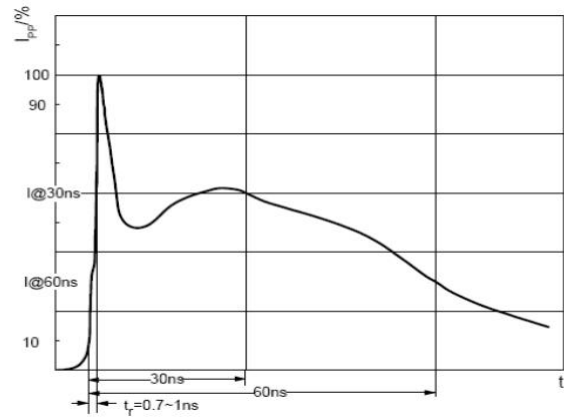

ESD pulse waveform according to IEC61000-4-2

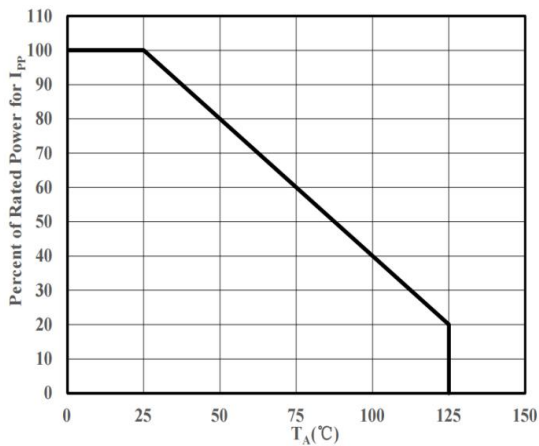

Power Derating Curve

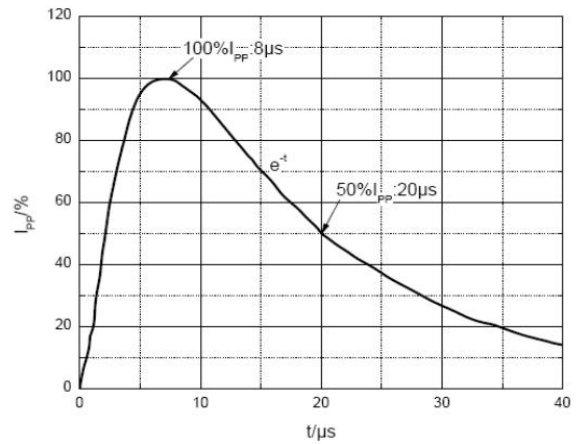

8/20uS pulse waveform according to IEC 61000-4-5



Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 °C
	-Temperature Max($T_{s(max)}$)	+200 °C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3 °C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3 °C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217 °C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5) °C
Time within 5 °C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6 °C/sec. Max
Time 25 °C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260 °C



Package Dimensions & Suggested Pad Layout

SOT23

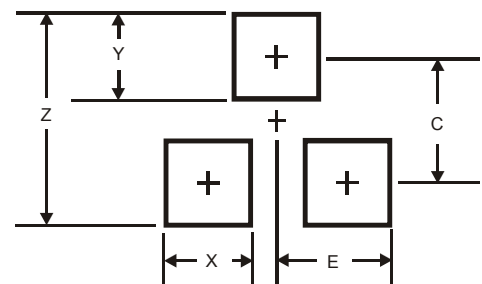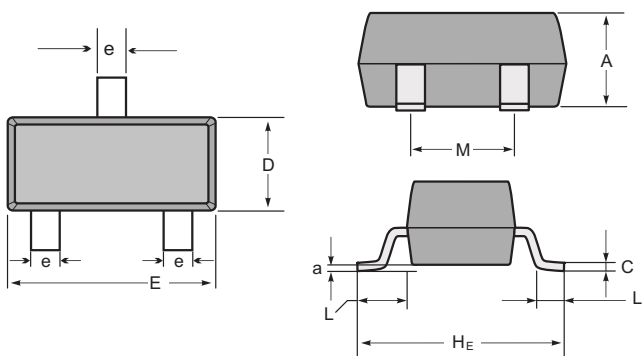

SOT-23 mechanical data

UNIT	A	C	D	E	H _E	e	M	L	L ₁	a	
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

Dimensions	SOT23
Z	2.9
X	0.8
Y	0.9
C	2.0
E	1.35

Tape & reel specification

Tape		Symbol	Dimension (mm)
		P0	4.00±0.10
		P1	4.00±0.10
		P2	2.00±0.10
		D0	1.55±0.10
		D1	1.05±0.10
		E	1.55±0.10
		F	3.60±0.10
		W	8.00±0.10
		A0	3.80±0.20
		B0	3.25±0.20
		K0	1.45±0.10
		T	0.25±0.05
		D2	178.0±3.0
		D3	55Min.
		D4	R24.0±3.0
		G	R82.0±3.0
I	13.0±2.0		
W1	11.0±3.0		
Quantity: 3000PCS			

7" Reel		Symbol	Dimension (mm)	
		D2	178.0±3.0	
		D3	55Min.	
		D4	R24.0±3.0	
		G	R82.0±3.0	
		I	13.0±2.0	
		W1	11.0±3.0	
		Quantity: 3000PCS		