

修 订	标 记	修 改 描 述	签 名	日 期
REV NO	MARK	REVISION DESCRIPTION	SIGNATURE	DATE
		NEW DWG		2016-03-12

NOTES:

- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:NATURE
- 2.ACTUATOR: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 3.TERMINAL:PHOSPHOR BRONZE

PLATING:1*''GOLD PLATING OR 100~150*''TIN(LEAD FREE)
OVERALL 50~100*''NICKEL UNDER PLATED.

- 4.FITTING NAIL:PHOSPHOR BRONZE

PLATING:100~150*''TIN(LEAD FREE)
OVERALL 50~100*''NICKEL UNDER PLATED.

- 5.SPECIFICATION:








CURRENT RATING: 0.5A 50V AC/DC

CONTACT RESISTANCE: 30mΩ MAX

INSULATION RESISTANCE: 100MΩ AT 500V DC

OPERATING TEMPERATURE RANGE: -40°C~85°C

WITHSTANDING VOLTAGE: 500V AC/minute

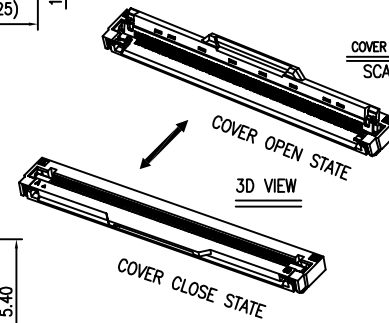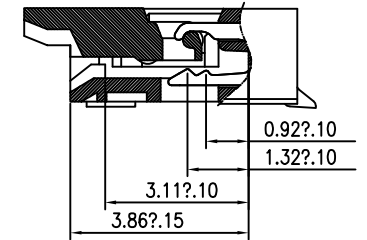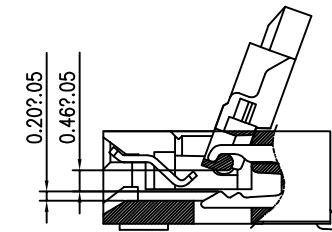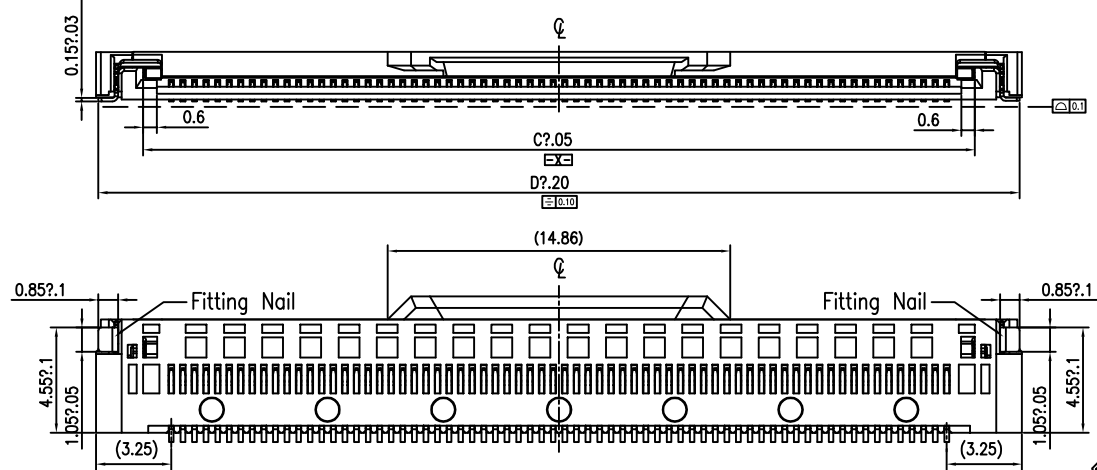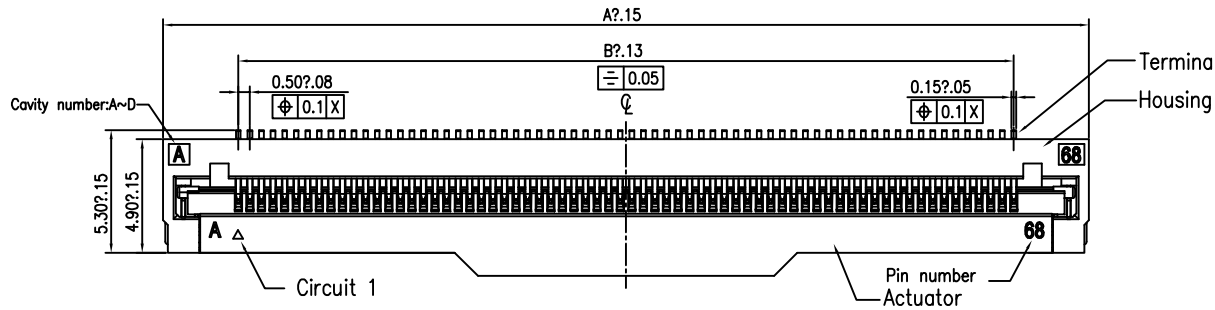

COVER OPEN DIM.
SCALE 2:1

CABLE INSERT DIM.
SCALE 2:1

NO.of contacts	Dimensions			
	A.	B.	C.	D.
40	26.00	19.50	21.93	25.80
50	31.00	24.50	26.93	30.80
60	36.00	29.50	31.93	35.80
68	40.00	33.50	35.93	39.80
80	46.00	39.50	41.93	45.80
96	54.00	47.50	49.93	53.80




RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05






深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co., LTD
电话 : 0755-27111216 传真 : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		TITLE: 产品名称: FPC0.5间距2.1高掀盖下接带扣0530窄版	
X.X ±0.30	X.X* ±3°	APPD: 核准:	PART NO: 产品编号: HDGC0530-96CL-GF
X.XX ±0.20	X.XX* ±2°	CHECK: 校对: 王建业	DATE SCALE UNIT CODE NUMBER
X.XXX ±0.10	X.XXX* ±1°	DRAW: 绘图: 黄艳兰	2016-03-12 1:1 mm A001

修 订 REV NO	标 记 MARK	修 改 描 要 REVISION DESCRIPTION	签 名 SIGNATURE	日 期 DATE
		NEW DWG		2016-03-12

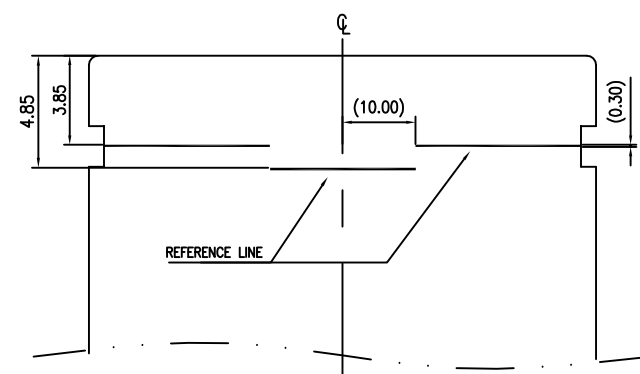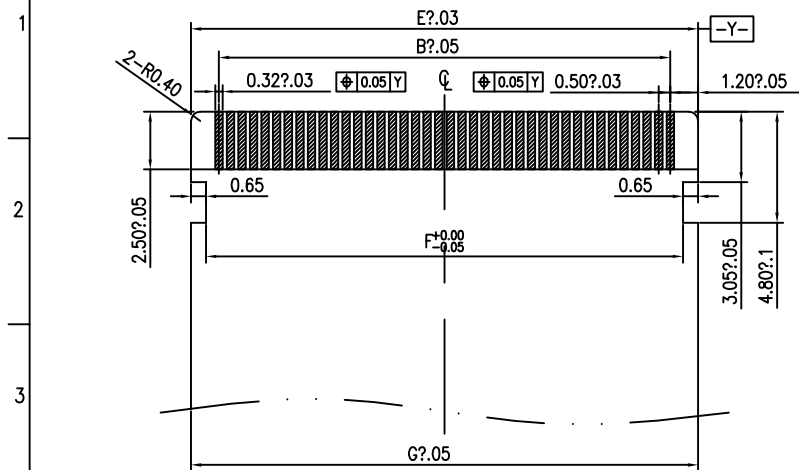

APPLICABLE FPC/FFC
蓝白裸线（不接地）

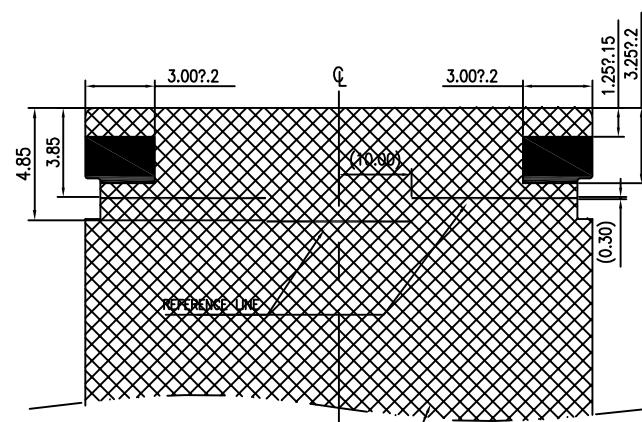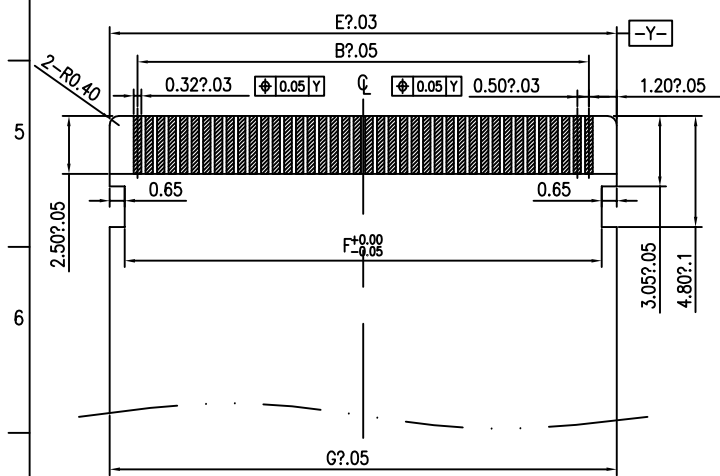

一体补强板铝箔FFC线

APPLICABLE FPC/FFC
一体补强板铝箔FFC线







NO.of contacts	Dimensions			
	B.	E.	F.	G.
40	19.50	21.90	20.60	21.90
50	24.50	26.90	25.60	26.90
60	29.50	31.90	30.60	31.90
68	33.50	35.90	34.60	35.90
80	39.50	41.90	40.60	41.90
96	47.50	49.90	48.60	49.90



深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co., LTD
电话：0755-27111216 传真：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		TITLE: 产品名称: FPC0.5间距2.1高掀盖下接带扣0530窄版	
X.X ±0.30	X.X* ±3°	APPD: 核准:	PART NO: 产品编号: HDGC0530-96CL-GF
X.XX ±0.20	X.XX* ±2°	CHECK: 校对: 王建业	DATE
X.XXX ±0.10	X.XXX* ±1°	DRAW: 绘图: 黄艳兰	SCALE
			UNIT
			CODE NUMBER

修 订	标 记	修 改 描 要	签 名	日 期
REV A0		NEW DWG		2016-03-12

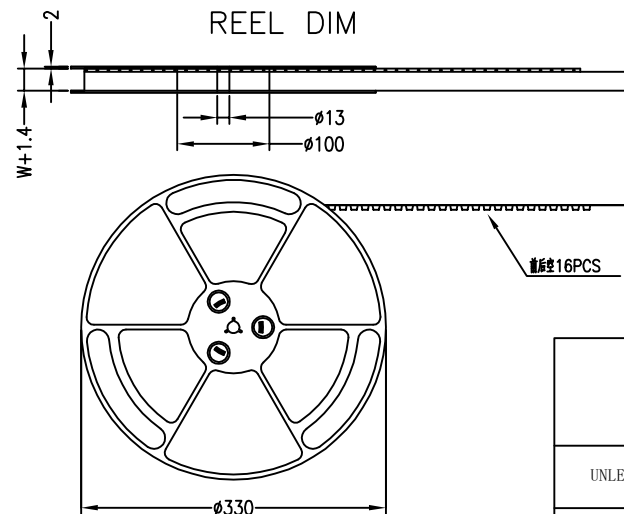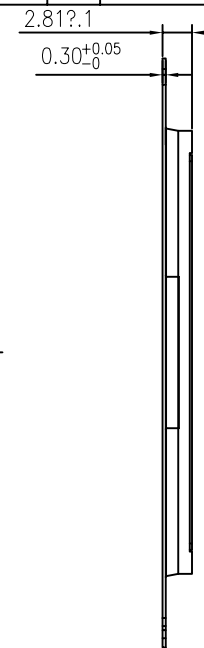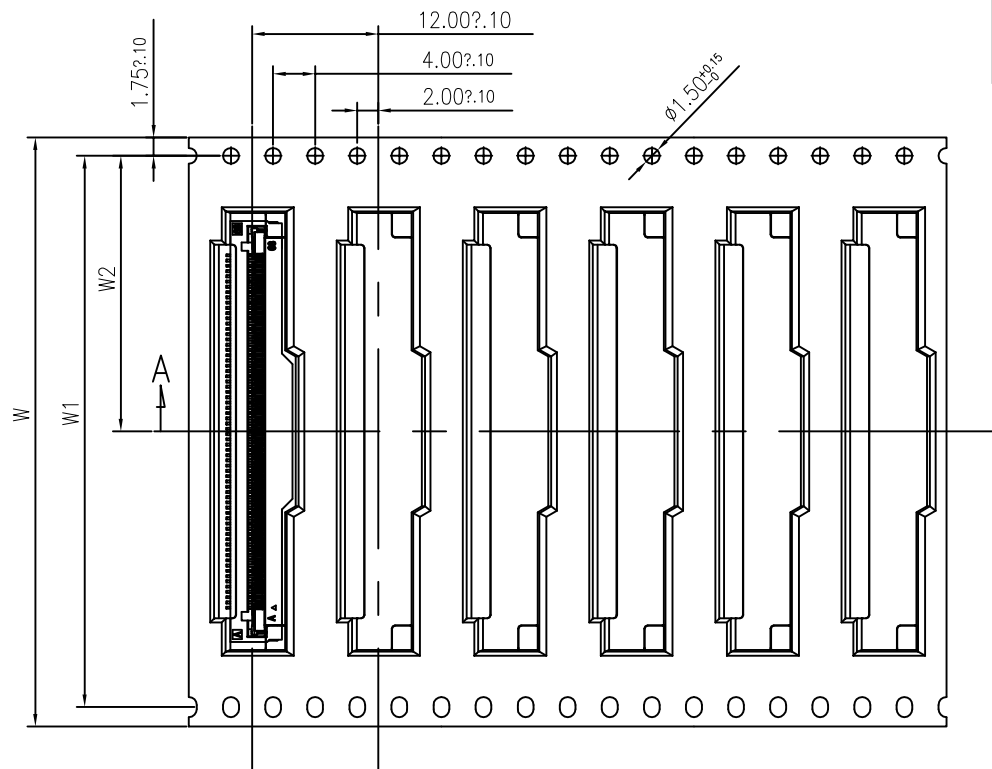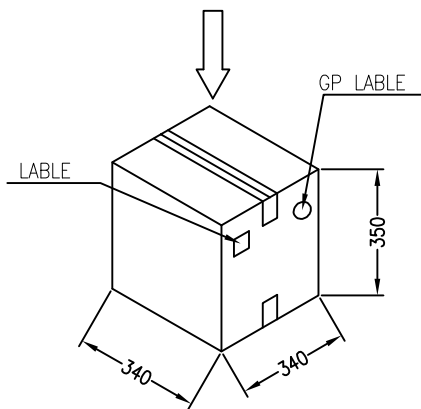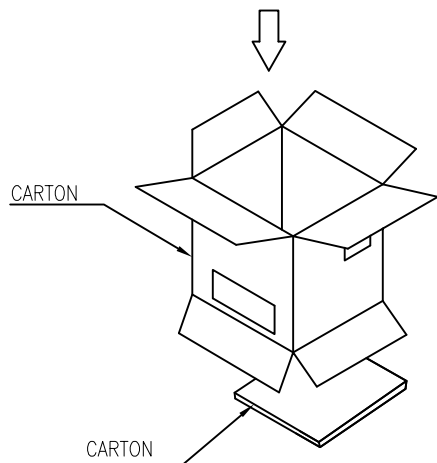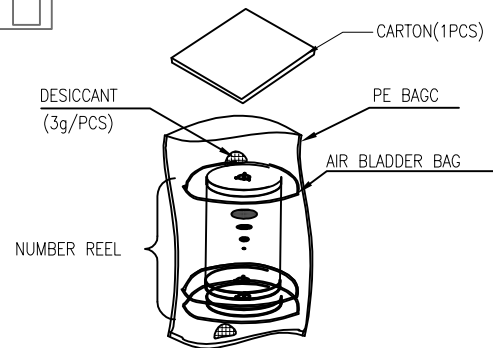

NOTES:

- 1.Component load per 13" reel:2000 pcs
- 2.Material: white conductive polystyrene alloy.
- 3.Thickness:0.3±0.05mm
- 4.All dimensions meet EIA-481-C requirements

No.of Contacts	DIM			REEL (CARTON)	SUM(PCS)
	W	W1	W2		
40pin~50pin	44	20.2	40.4	6	12000
51pin~74pin	56	52.4	26.2	5	10000
75pin~96pin	72	68.4	34.2	4	8000



深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话：0755-27111216 传真：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		TITLE: 产品名称: FPC0.5间距2.1高掀盖下接带扣0530窄版	
X.X ±0.30	X.X* ±3°	APPD: 核准:	PART NO: 产品编号: HDGC0530-96CL-GF
X.XX ±0.20	X.XX* ±2°	CHECK: 校对: 王建业	DATE
X.XXX ±0.10	X.XXX* ±1°	DRAW: 绘图: 黄艳兰	SCALE
			UNIT
			CODE NUMBER