


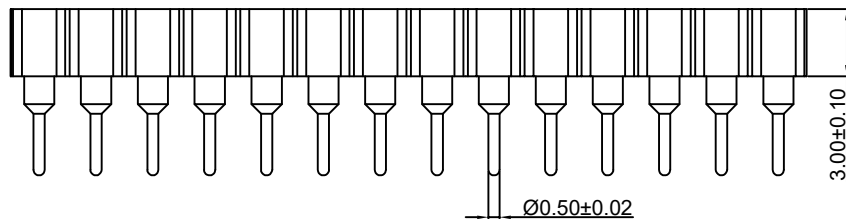


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

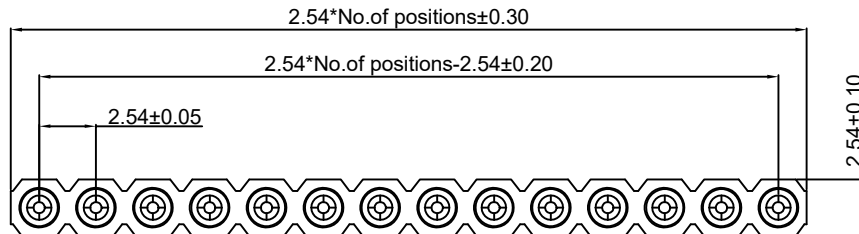

P.C.B LAYOUT

Technical Data

Material:

Contact Material:Copper Alloy

Contact Plating: Au or Sn Over Ni

Insulator Material:PPS UL94V-0

Electrical:

Rating current:3Amps/contact max

Rating voltage:60V AC/DC

Contact resistance:≤20mΩ/contact

Insulation resistance:≥1000MΩ

withstanding Voltage:500V AC/minute

Mechanical:

Operating temperatures:Gold Plated:-55℃ to +105℃

Tin Plated:-40℃ to +105℃

Soldering temperature:+260℃ MAX(PPS)

Ordering Code:

MF254V-11-XX-0743

1 2

1.序列号

2.Pin位数: 02x40P

X.±0.50	X.°±	PART NO: MF254V-11-XX-0743		XFCN 兴飞连接器		
.X±0.25	.X°±					
.XX±0.15	.XX°±	TITLE: 2.54mm Machined Female Header		0769-82001899		
.XXX±0.10	.XXX°±			www.xfconn.com		
UNITS:	mm	DWG NO: /		VIEW SHEET REV		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN						
		APPD	Chen ZhiQiang			
		CHKD	Liu Wei			
		DRAW	Chen HongJiang			
		DATE	2024.09.14	NONE	1/1	A1