


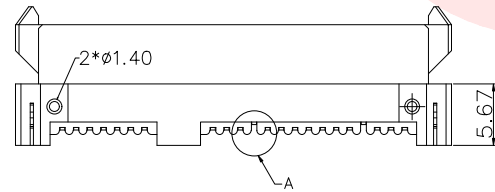

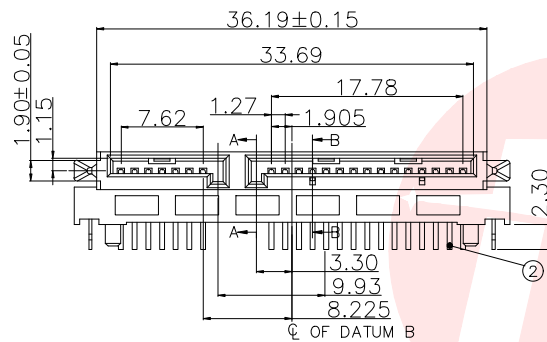


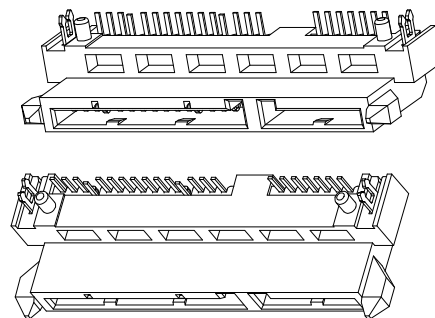


REV.	ECN NO OR DESCRIPTION	REVISED	DATE

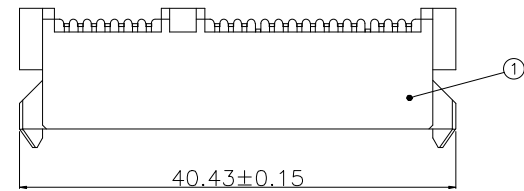

SPECIFICATION:

- 1.MATERIAL:
1.1 HOUSING: LCP UL 94V-0
1.2 COLOR:BLACK
1.3 CONTACT: PHOSPHOR BRONZE C5191R-H, T=0.25mm
1.4 PEG: BRASS C2680R-H, T=0.30mm
2.FINISH:
2.1 CONTACT: 1u"/3u"/5u"/15u" GOLD PLATING ON CONTACT AREA
2.2 100u" TIN PLATING ON SOLDERTAILS
2.3 30u" NICKEL UNDERPLATING OVER ALL
2.4 PEG:100u" TIN PLATING ON SOLDERTAILS
2.5 30u" NICKEL UNDERPLATING OVER ALL

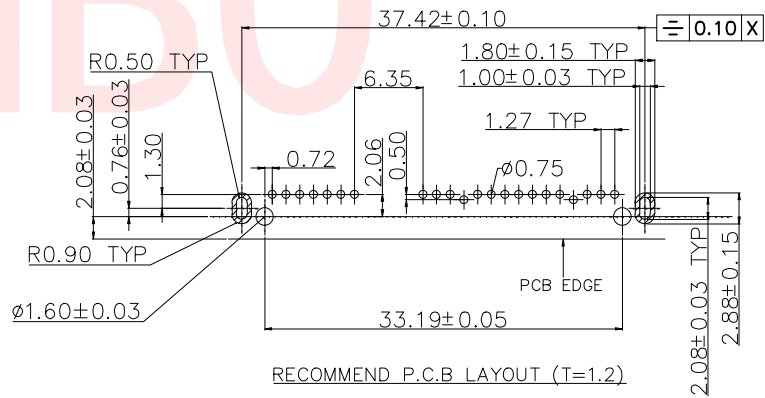

RECOMMEND P.C.B LAYOUT (T=1.2)

ITEM	DIM A
SATA-022FB-22PS1BY	2.10
SATA-022F-22PS1BY	2.30
SATA-022FC-22PS1BY	2.45
SATA-022FD-22PS1BY	2.59

环保要求		产品必须符合ROHS要求		
3	Peg	Brass C2680	Tin/Ni Plated	
2	Terminal	Pho.Bronze C5191R-H	Gold/Tin Plated	
1	Housing	High Temp	Black	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD		
DECIMALS: ANGLES:		TITLE SATA 7+15P 母座板下6.74DIP		
X	±0.30	X	±2°	DWN xiong PART NO. SATA-022F-22PS1BY
X.X	±0.20	X.X	±1°	CHKD lee SCALE:1:1 UNIT: mm
X.XX	±0.10	APVD wang	SIZE: A4	SHEET:10F 1 REV: A4
CUSTOMER COPY				