



MTA 156

TE Internal #: 4-644615-1
PCB Mount Header, Vertical, Wire-to-Board, 11 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Power, MTA 156

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: **Wire-to-Board**
Number of Positions: **11**
Number of Rows: **1**
Centerline (Pitch): **3.96 mm [.156 in]**
PCB Mount Orientation: **Vertical**

Features

Product Type Features

Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Keying & Polarized Position Locations	4&5, 7&8
Number of Columns	11
Number of Positions	11
Number of Rows	1
PCB Mount Orientation	Vertical

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features



Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Mating Area Length	11.43 mm[.45 in]
Mating Square Post Dimension	1.14 mm[.045 in]
PCB Contact Termination Area Plating Material Thickness	3.81 µm[150 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	3.81 µm[150 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Square
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	7 A

Termination Features

Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment Type	Pegs
Mating Alignment Type	Polarization
Mating Retention	With
Panel Mount Feature	Without
PCB Mount Retention Type	Pegs
Mating Retention Type	Polarized Lock
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without



Housing Features

Housing Material	Polyester - GF
Centerline (Pitch)	3.96 mm[.156 in]

Dimensions

Connector Length	43.46 mm[1.711 in]
Connector Height	14.61 mm[.575 in]
Connector Width	10.8 mm[.425 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Agency/Standard	CSA, UL
Approved Standards	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	500
Packaging Type	Bag, Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # CAT-103156-WBHSM Receptacle Housing: Wire-to-Board, with Mating Alignment, SL156	 TE Part # 1-640251-1 11P SL156 HSG W/O LCK RAMP	 TE Part # 4-640426-1 11P MTA156 CONN ASSY 18AWG ORA	 TE Part # 1-643071-1 11P MTA156 FD-THRU COVER
 TE Part # 4-643819-1 11P MTA156 CONN ASSY 22AWG LF	 TE Part # 4-644465-1 11P MTA156 CONN ASSY 18AWG ORA	 TE Part # 1-640643-1 11P MTA156 COVER F/T	 TE Part # 4-640599-1 11P MTA156 CONN ASSY 18AWG ORA
 TE Part # 4-640427-1 11P MTA156 CONN ASSY 20AWG YEL	 TE Part # 4-644467-1 11P MTA156 CONN ASSY 22AWG LF	 TE Part # 1-643067-1 11P MTA156 MOLDED COVER	 TE Part # 1-640551-1 11P MTA156 COVER
 TE Part # 4-640428-1 11P MTA156 CONN ASSY 22AWG RED	 TE Part # 4-640600-1 11P MTA156 CONN ASSY 20AWG LF	 TE Part # 4-640601-1 11P MTA156 CONN ASSY 22AWG LF	 TE Part # 4-643817-1 11P MTA156 CONN ASSY 18AWG ORA



TE Part # 4-643818-1
11P MTA156 CONN ASSY 20AWG YEL

TE Part # 3-647618-7
07P MTA156 POL LOCK HDR TIN W /O 2,4,6

TE Part # 4-640429-1
11P MTA156 CONN ASSY 24AWG WHT

TE Part # 4-640430-1
11P MTA156 CONN ASSY 26AWG BLU

Also in the Series | MTA 156

Insertion & Extraction Tools(1)

PCB Connector Covers(88)

PCB Connector Keying(2)

PCB Connector Mounting(1)

PCB Headers & Receptacles(314)

Power Contacts(2)

Rectangular Power Connectors(698)

Standard Rectangular Connectors(337)

Wire-to-Board Connector Contacts(2)

Customers Also Bought

TE Part #770849-6
Receptacle Housing: Wire-to-Board, with Mating Alignment, SL156


TE Part #170327-1
250 PL MKII REC. 22-18AWG PTBR

TE Part #1437565-2
FSM100=12MM, TACTILE, PB SWITCH

TE Part #1586090-1
06P UMNL PINHDR NO DRAIN HOLE




TE Part #1586176-1
12P UMNL PIN HDR 94VO NDH

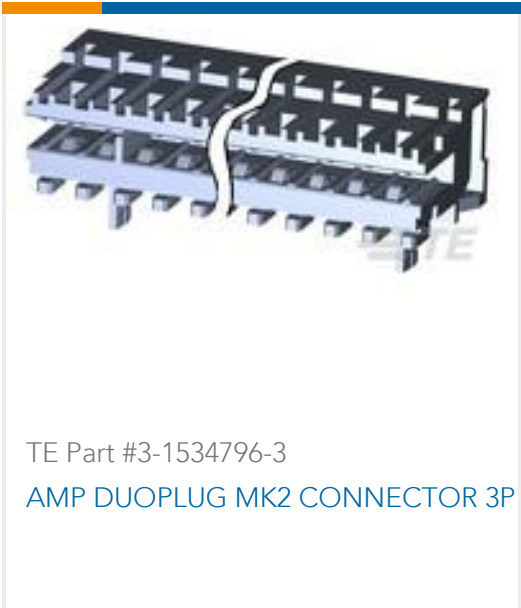

TE Part #3-1534796-3
AMP DUOPLUG MK2 CONNECTOR 3P



TE Part #1-1372732-4
Clamping lever

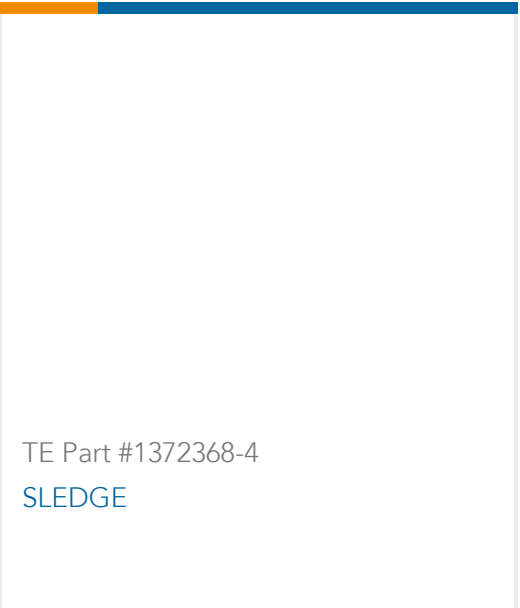

TE Part #1372368-4
SLEDGE

Documents

Product Drawings

11P MTA156 POL HDR ASSY LF

English

CAD Files

Customer View Model

ENG_CVM_4-644615-1_J.2d_dxf.zip

English

3D PDF

English

Customer View Model

ENG_CVM_4-644615-1_J.3d_igs.zip

English

Customer View Model

ENG_CVM_4-644615-1_J.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_4-644615-1_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_4-644615-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_4-644615-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

CSA Certificate

English

4-644615-1

PCB Mount Header, Vertical, Wire-to-Board, 11 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Power, MTA 156

